




## Parts List for F-25 FLUX CHIPPER

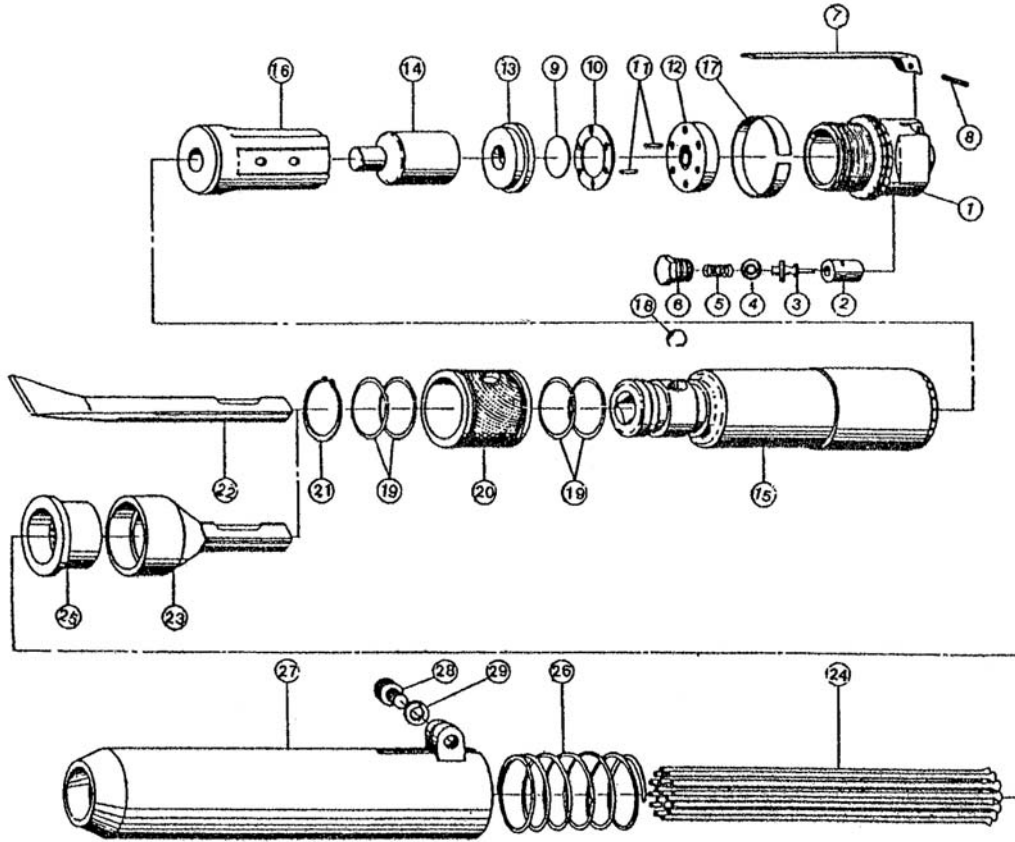

Ref. No.	Part No.	Description	Qty	Ref. No.	Part No.	Description	Qty
1	F25-01	Cylinder Cap	1	16	F25-16	Piston Sleeve	1
2	F25-02	Throttle Bushing	1	17	F25-17	Lock Ring	1
3	F25-03	Throttle Rod	1	18	SB-7/16	Steel Ball 7/16	1
4	F25-04	O-Ring	1	19	F25-19	O-Ring P24	4
5	F25-05	Spring 8x16	1	20	F25-20	Chisel Cover	1
6	F25-06	Throttle Cap	1	21	F25-21	Snap Ring STW30	1
7	F25-07	Throttle Lever	1	22	F25-22	Chisel, 1-3/8 wide angle	1
8	F25-08	Spring Roll Pin 3x22	1	23	F25-23	Needle Shank	1
9	F25-09	Main Valve	1	24	N307	Needle	19
10	F25-10	Main Valve Case	1	25	F25-25	Needle Flange	1
11	F25-11	Pin 2.8x11	2	26	F25-26	Spring 38x83	1
12	F25-12	Lower Main Valve	1	27	F25-27	Needle Cover	1
13	F25-13	Upper Main Valve	1	28	F25-28	Hex Socket Bolt M8x20	1
14	F25-14	Piston	1	29	F25-29	Spring Washer M8x2	1
15	F25-15	Cylinder Body	1		RBK-25	Rebuild Kit	

### JET

427 New Sanford Road  
 LaVergne, Tennessee 37086  
 Ph.: 800-274-6848  
 www.jettools.com

### M-F25

Revision B 08/2014

Copyright © 2014 JET, a Division of JPW Industries, Inc.

# Specifications for F-25 Flux Chipper

Stock Number .....	F-25
Blows per minute .....	4000
Stroke length (in.) .....	7/8
Required Air Pressure (PSI) .....	90
Average Air Consumption (CFM) .....	4
Air Inlet Diameter (in.) .....	1/4
Air Hose Inside Diameter (in.) .....	3/8
Vibration Value (m/s <sup>2</sup> ) .....	2.5
Overall Length (in.) .....	8-3/8
Net Weight (lbs.) .....	5

*The specifications in this document were current at time of publication, but because of our policy of continuous improvement, JET reserves the right to change specifications at any time and without prior notice, without incurring obligations.*