SPECIFY CATALOG NO. AND SERIAL NO. WHEN ORDERING PARTS

REVISED BULLETIN 54-40-2601	DATE Aug. 2014

CORDLESS 18V COMPACT BAND SAW

CATALOG NO.	**2629-20**	STARTING SERIAL NO.	**C14C**

WIRING INSTRUCTION
SEE PAGES 5, 6, 7 & 8

EXAMPLE:
Component Parts (Small #) Are Included When Ordering The Assembly (Large #).

FIG.	PART NO.	DESCRIPTION OF PART	NO. REQ.
35	06-82-5574	10-24 x 7/8" Pan Hd. Tapt. T-25 Screw	(7)
36	06-82-0035	M5 Pan Hd. T-20 Screw	(3)
39	---------------	Deck	(1)
47	---------------	Brush Card	(1)
48	22-56-0150	Wire Nut (C1 & C2)	(2)
50	18-01-3015	Service Field	(1)
52	16-01-3091	Service Armature	(1)
53	05-78-0305	Switch Screw	(4)
54	45-88-1890	Spring Washer	(4)
55	06-82-5320	8-32 x 5/8" Pan Hd. Slt. Tapt. T-20 Screw	(3)
56	28-28-0060	Diaphragm	(1)
57	02-04-0645	Ball Bearing	(1)
58	---------------	1st Gear	(1)
59	---------------	Ball Bearing	(1)
60	---------------	2nd Bevel Pinion	(1)
61	---------------	Bevel/Spur Gear	(1)
62	---------------	Needle Bearing	(2)
63	---------------	Gearcase	(1)
64	02-04-0135	Ball Bearing	(1)
66	45-30-0255	Rubber Slug	(4)
67	---------------	3rd Gear	(1)
68	---------------	Pulley Shaft	(1)
69	43-96-0105	Key	(1)
70	02-04-1525	Ball Bearing	(1)
71	45-88-0406	Washer	(1)
72	28-14-0180	Bearing Plate Bottom	(1)
73	06-82-7261	6-19 x 11/16" Pan Hd. Slt. Plast. T-15 Screw	(2)
74	06-82-7270	8-16 x 5/8" Pan Hd. Slt. Plast. T-20 Screw	(12)
75	---------------	Handle - Left	(1)
76	40-50-0650	Compression Spring	(1)
77	---------------	Terminal Block Assembly	(1)
78	42-55-0100	Carrying Case	(1)
79	06-82-5294	1/4-20 x 3/4" Pan Hd. Tapt. T-30 Screw	(2)
80	23-66-1000	Switch	(1)
81	06-82-7251	8-16 x 3/8" Pan Hd. Slt. Plast. T-20 Screw	(1)
82	---------------	Lock-Off Shuttle	(1)
83	40-50-0665	Detent Spring	(1)
84	10-20-1865	LED Label	(1)
85	---------------	PCB	(1)
86	---------------	Handle - Right	(1)
87	06-82-0045	3/8"-16 UNC-3A Hex Recess Screw	(1)
88	31-44-0095	Front T-Handle	(1)
89	06-82-5316	8-32 x 1/2" Pan Hd. Slt. Tapt. T-20 Screw	(2)
90	45-88-0825	Washer	(2)
91	---------------	Motor Cover	(1)
92	---------------	Wire Assembly	(1)
93	---------------	LED Switch Box	(1)
94	31-44-0305	Handle Kit	(1)
95	31-15-0205	Motor Cover Assembly	(1)
96	28-90-0015	Deck Assembly	(1)
105	●	Bevel Pinion Assembly ⎫ ORDER AS A SET	(1)
106	●	Bevel/Spur Gear Assy. ⎭ Cat. No. 32-05-2629	(1)
107	14-73-0040	Pulley Gear Assembly	(1)
108	14-30-0050	Top Gearcase Assembly	(1)
109	45-24-0055	Shuttle Lock-Off Kit	(1)
110	14-20-0025	Electronics Kit	(1)
113	05-88-0928	M3 x 5mm Pan Hd. T-10 Screw	(2)
114	45-88-1980	Spring washer	(2)
115	---------------	Leadwire Assembly - Red	(1)
116	---------------	Leadwire Assembly - Black	(1)
117	14-46-2397	Leadwire/Screw/Washer Kit	(1)
118	14-46-2016	Brush Card Assembly	(1)

GEAR ASSEMBLIES #105 & #106 MUST BE ORDERED AS A SET CAT. NO. 32-05-2629

Soldered

Screwed

#118 two styles of Brush Card Assemblies See Page Two

SEE ADJACENT PAGES FOR ADDITIONAL SERVICE NOTES, LUBRICATION AND WIRING
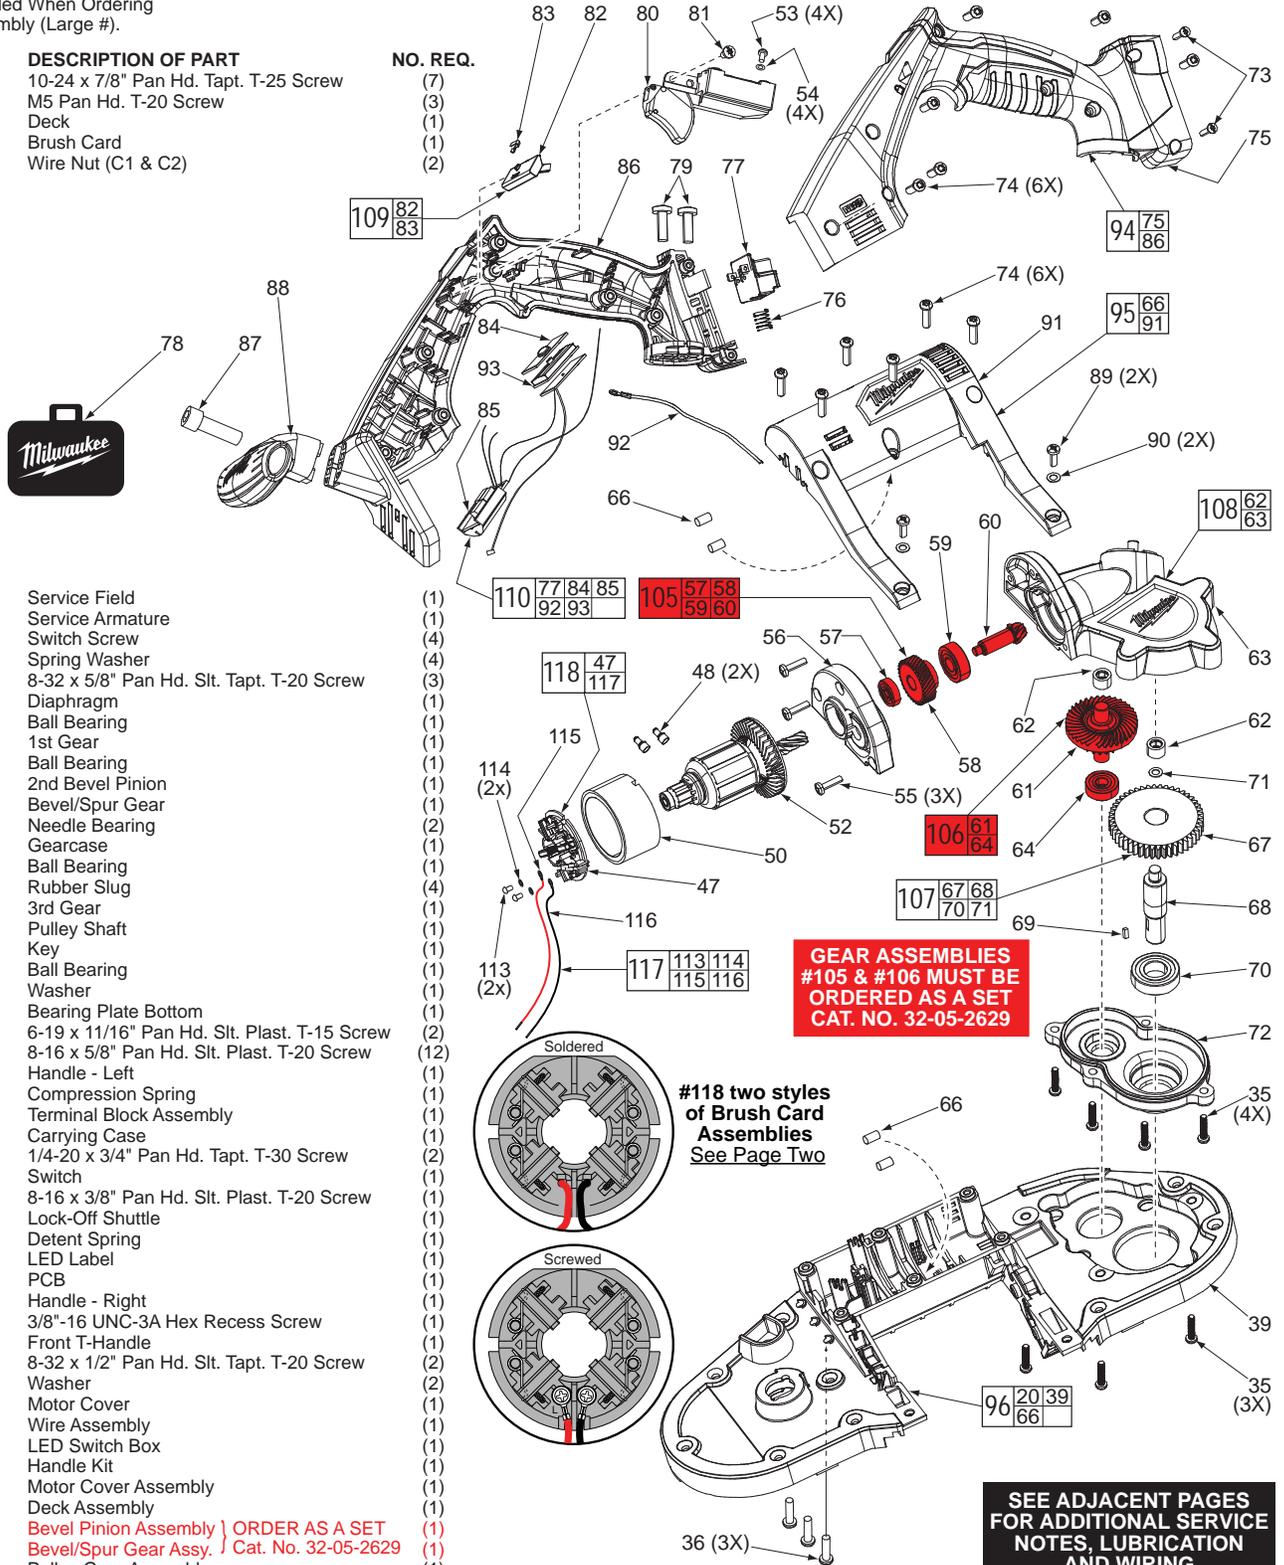
**FIG.** **NOTE:**
64,70   Orient the Ball Bearings so the seal faces the gears.

68   Apply approximately .1g Loctite® C5-A Copper Anti-Seize (or equivalent) to bottom portion of Pulley Shaft that fits into Rear Pulley (4).

MILWAUKEE ELECTRIC TOOL CORPORATION
13135 W. LISBON RD., BROOKFIELD, WI 53005

Drwg. 2

Soldered-
Original design

Screwed-
New design

**Back View**
Brush Card Assemblies
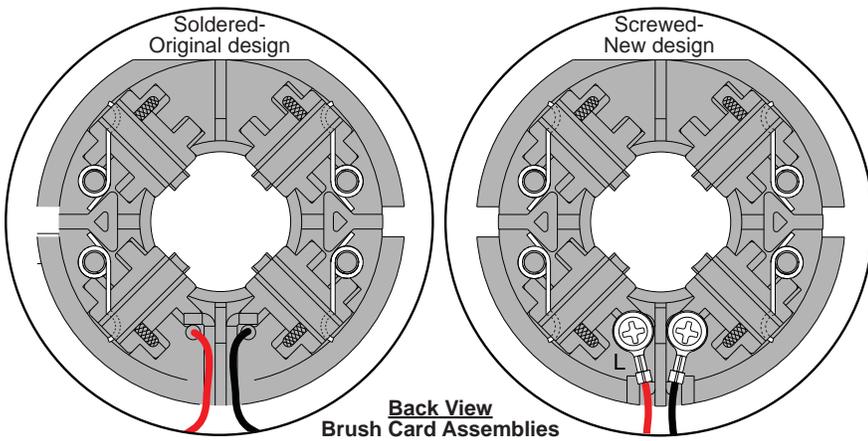
NOTE:
There are two Brush Card Assembly designs.

On the original brush card design the red and black wires that go to the switch are soldered on the brush card.

On the new brush card design the red and black wires that go to the switch are secured to the brush card with spring washers and screws.

The new brush card design is **directly interchangeable** in tools that have the old brush card design.

Black

Red

Brush Card Assy.

Brush Shunt (4 places)

Right Brush Spring (2x)

Carbon Brush (4x)

Left Brush Spring (2x)
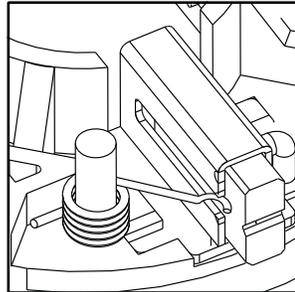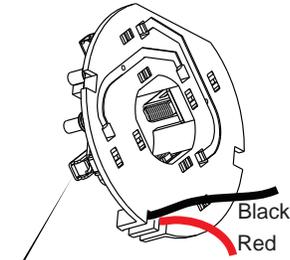
NOTE:
As an aid to prevent damage to the armature commutator or the brushes when removing and installing the armature assembly, it is recommended to pull the carbon brushes partially back into the brush tube. The carbon brushes will be held in place with the brush spring moving from the rear of the brush to the side of the brush.

In the unlikely event that the spring pops off follow the instructions below.
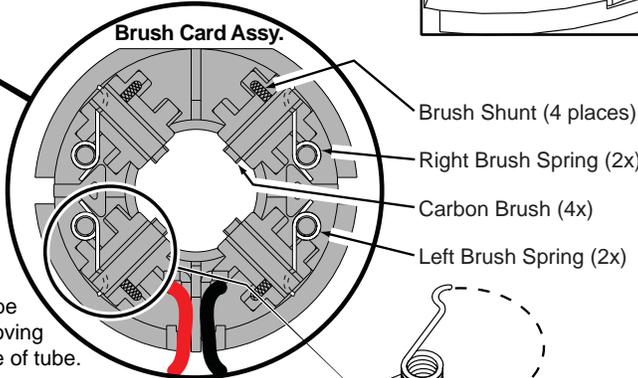
Be sure carbon brush is in brush tube with brush shunt moving freely in side groove of tube.

Place brush spring over post with short leg positioned downward as shown. Be sure spring is completely down with short leg trapped against 'Y' shaped wall on brush card.

While holding spring in place, bring the long leg of spring over the brush tube and through rear opening of tube. Position rounded hook of spring in groove on back of carbon brush. Be sure to check for free movement between carbon brush, brush shunt and brush spring.

Wrong

Correct

Short leg of spring to the bottom
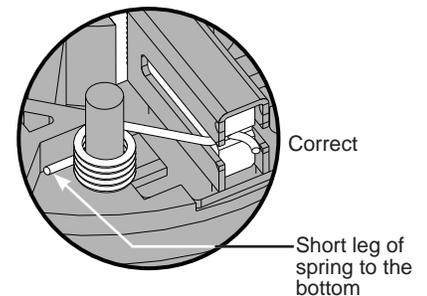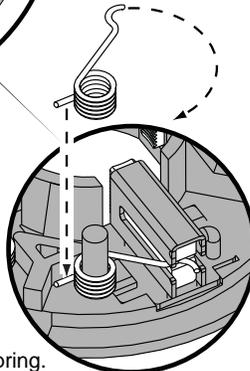
★= **Part number change**
from previous
service parts list.

104 | 41 | 44
     | 45 | 46

96 | 20 | 39
   | 66 |

103 | 37 | 38

113 | 21 | 22
    | 23 | 49

98 | 12

97 | 9 | 10

10 | 7 | 13 | 14
   | 15 | 16 | 18

101 | 11 | 26 | 27 | 28 | 29
    | 30 | 31 | 33 | 89 | 90

100 | 26 | 27 | 28
    | 29 | 30 | 31

102 | 11 | 26 | 27 | 28 | 29
    | 30 | 31 | 32 | 89 | 90

* No. 14-46-0715
Band saw shim service kit
available, not shown
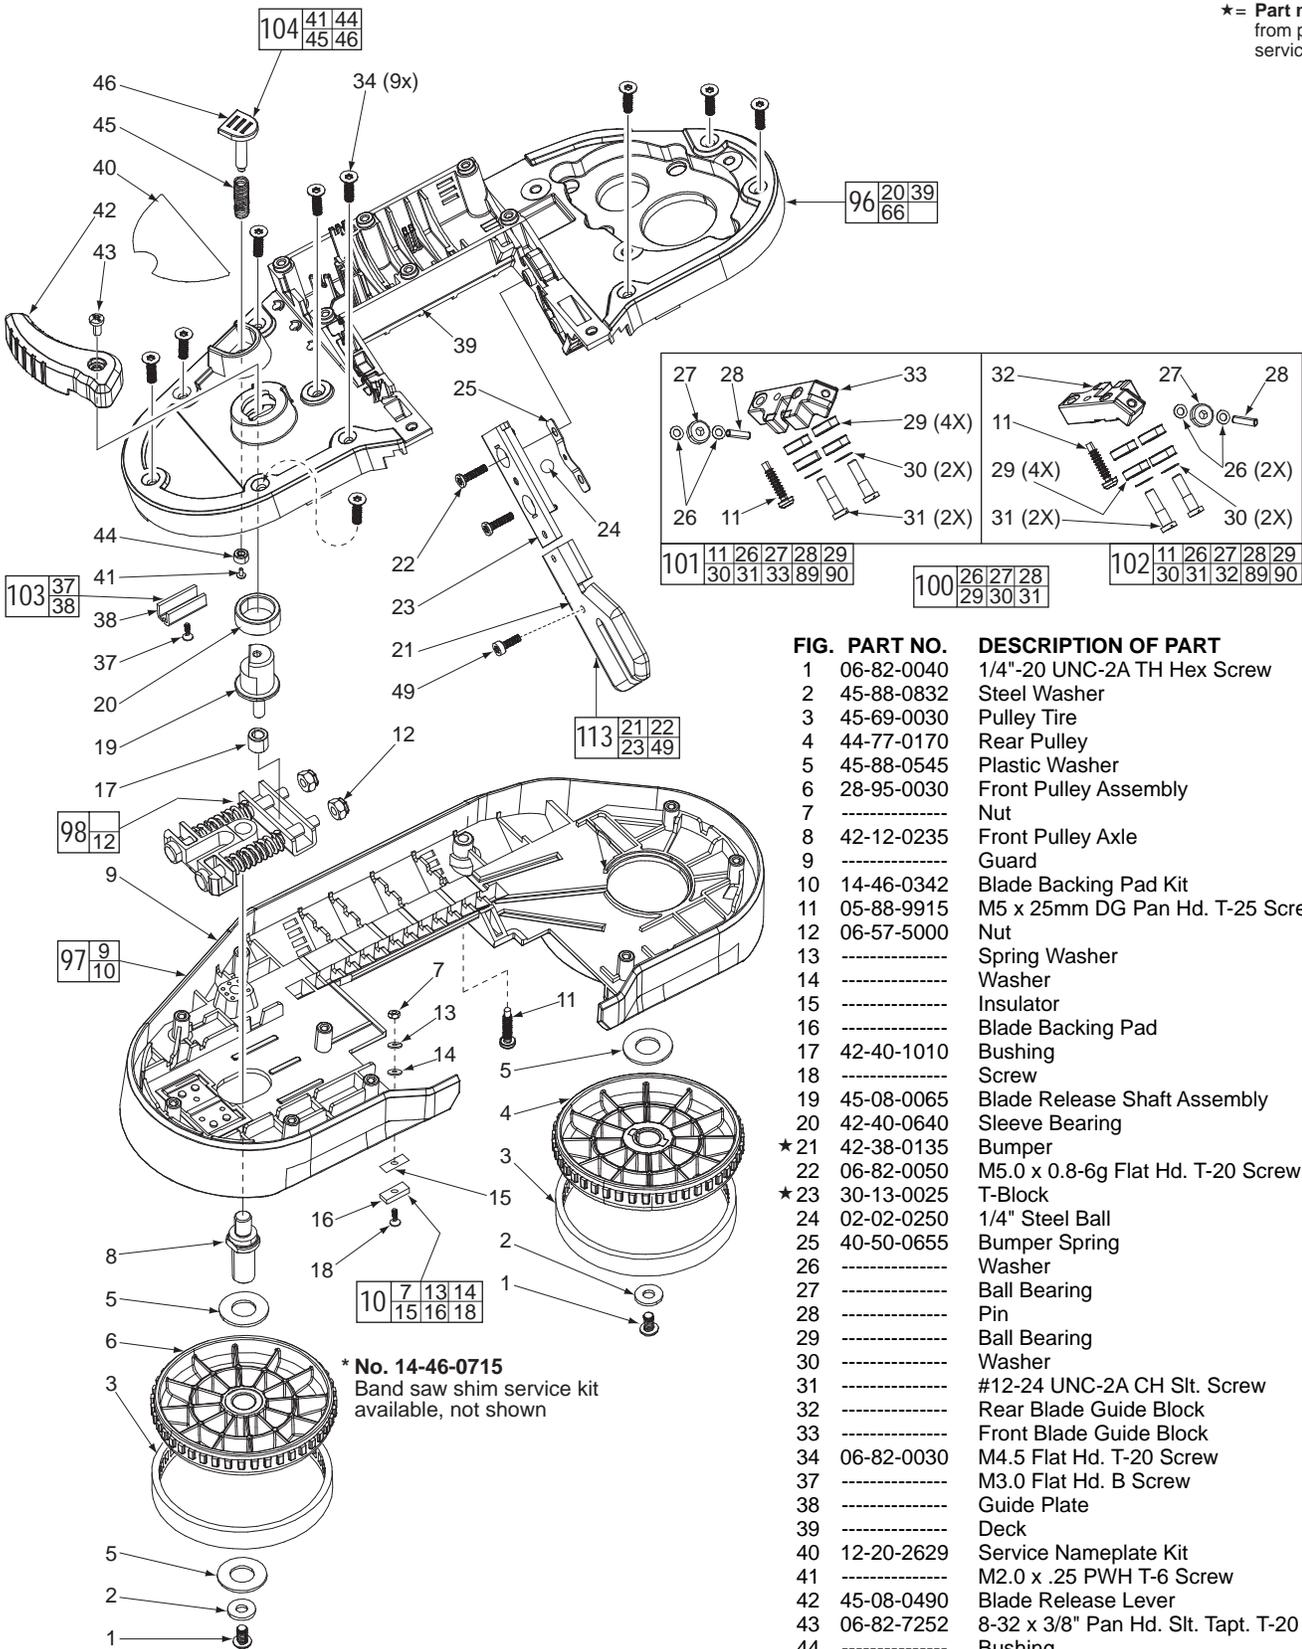
FIG.	PART NO.	DESCRIPTION OF PART	NO. REQ.
1	06-82-0040	1/4"-20 UNC-2A TH Hex Screw	(2)
2	45-88-0832	Steel Washer	(2)
3	45-69-0030	Pulley Tire	(2)
4	44-77-0170	Rear Pulley	(1)
5	45-88-0545	Plastic Washer	(3)
6	28-95-0030	Front Pulley Assembly	(1)
7	--------------	Nut	(1)
8	42-12-0235	Front Pulley Axle	(1)
9	--------------	Guard	(1)
10	14-46-0342	Blade Backing Pad Kit	(1)
11	05-88-9915	M5 x 25mm DG Pan Hd. T-25 Screw	(3)
12	06-57-5000	Nut	(2)
13	--------------	Spring Washer	(1)
14	--------------	Washer	(1)
15	--------------	Insulator	(1)
16	--------------	Blade Backing Pad	(1)
17	42-40-1010	Bushing	(1)
18	--------------	Screw	(1)
19	45-08-0065	Blade Release Shaft Assembly	(1)
20	42-40-0640	Sleeve Bearing	(1)
★21	42-38-0135	Bumper	(1)
22	06-82-0050	M5.0 x 0.8-6g Flat Hd. T-20 Screw	(2)
★23	30-13-0025	T-Block	(1)
24	02-02-0250	1/4" Steel Ball	(1)
25	40-50-0655	Bumper Spring	(1)
26	--------------	Washer	(4)
27	--------------	Ball Bearing	(2)
28	--------------	Pin	(2)
29	--------------	Ball Bearing	(8)
30	--------------	Washer	(4)
31	--------------	#12-24 UNC-2A CH Slt. Screw	(4)
32	--------------	Rear Blade Guide Block	(1)
33	--------------	Front Blade Guide Block	(1)
34	06-82-0030	M4.5 Flat Hd. T-20 Screw	(9)
37	--------------	M3.0 Flat Hd. B Screw	(1)
38	--------------	Guide Plate	(1)
39	--------------	Deck	(1)
40	12-20-2629	Service Nameplate Kit	(1)
41	--------------	M2.0 x .25 PWH T-6 Screw	(1)
42	45-08-0490	Blade Release Lever	(1)
43	06-82-7252	8-32 x 3/8" Pan Hd. Slt. Tapt. T-20 Screw	(1)
44	--------------	Bushing	(1)
45	--------------	Spring	(1)
46	--------------	Blade Ejection Pin	(1)
★49	14-74-0275	Bandsaw Fixed Material Guide w/ Screw	(1)
96	28-90-0015	Deck Assembly	(1)
97	28-41-0052	Guard Assembly	(1)
98	42-18-0025	Blade Tension Bar Assembly	(1)
100	14-46-0465	Guide Block Hardware Kit	(1)
101	42-28-0410	Front Guide Block Assembly	(1)
102	42-28-0420	Rear Guide Block Assembly	(1)
103	44-66-0325	Guide Plate Kit	(1)
104	44-60-0240	Blade Ejection Shaft Kit	(1)
★113	42-38-0010	Bumper Assembly	(1)

FIG. **NOTE:**

24 Apply Loctite® Silver Grade Anti-Seize Stick 80209 (or equivalent) to Steel Ball.

8 Apply Loctite® Cleaner 755 (or equivalent) to Front Pulley Axle thread first then place a drop or two of Blue Loctite® 443 (or equivalent) to axle threads.

18,41 Apply a drop of Blue Loctite® 443 (or equivalent) to threads of each screw.

9,38 Apply Loctite® C5-A Copper Anti-Seize (or equivalent) to metal insert in Guard and to Guide Plate. Approximately .1g for each part.

Place approx. 1.75 oz. (5 gm) of grease on the 2nd Bevel Pinion (60) and Bevel Spur Gear (61).

Place approx. 1.75 oz. (5 gm) of grease on and around the 3rd Gear.

Place approx. 1.75 oz. (5 gm) of grease on the Armature Pinion and 1st Gear (58).
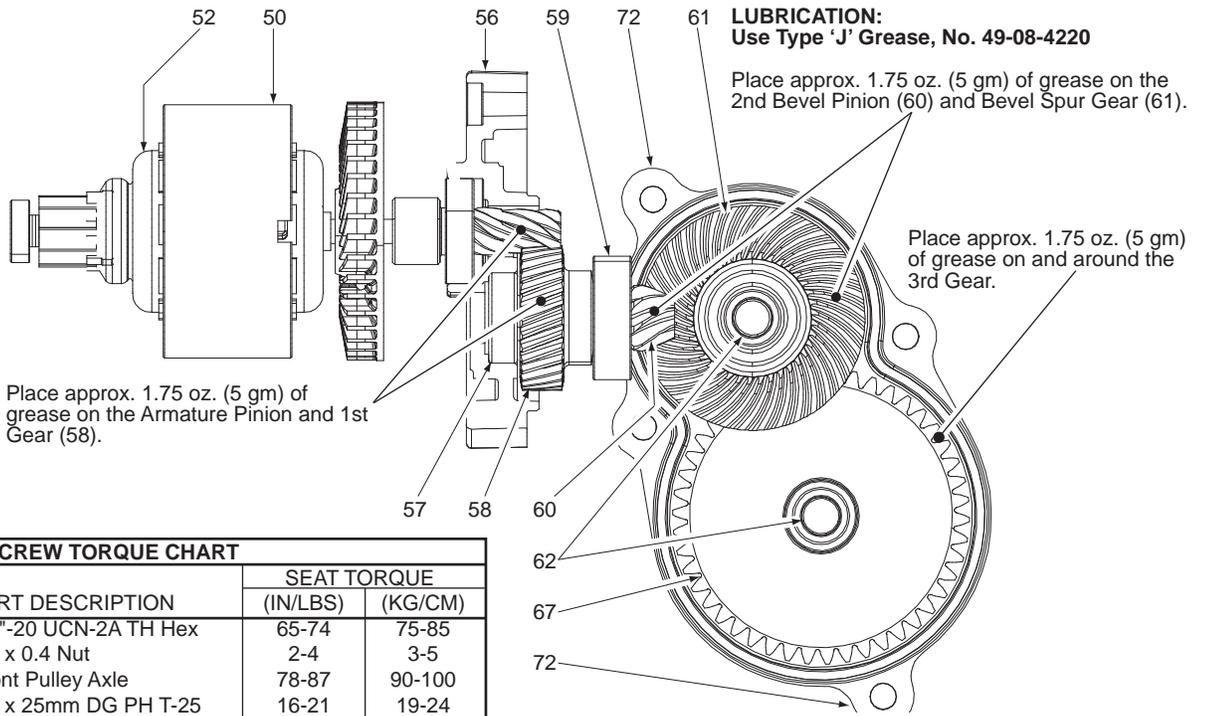
SCREW TORQUE CHART				
			SEAT TORQUE	
ITEM	PART NO.	PART DESCRIPTION	(IN/LBS)	(KG/CM)
1	06-82-0040	1/4"-20 UCN-2A TH Hex	65-74	75-85
7	---------------	M2 x 0.4 Nut	2-4	3-5
8	42-12-0235	Front Pulley Axle	78-87	90-100
11	05-88-9915	M5 x 25mm DG PH T-25	16-21	19-24
12	06-57-5000	Flex-Loc Nut	To Assembly Length	
18	---------------	M2 x 0.4 T-6	2-4	3-5
22	06-82-0050	M5 x .8-6g FH T-20	26-30	30-35
31	06-82-0120	#12-24 UNC-2A CH Slotted	39-48	45-55
34	06-82-0030	M4.5 FH T-20	16-21	19-24
35	06-82-5574	#10-24 x 7/8" PH T-25	39-48	45-55
36	06-82-0035	M5.0 PH T-20	22-26	25-30
37	06-82-0010	M3 FH B	6-9	7-10
41	06-82-0025	M2.0 x .25 PWH T-6	2-4	3-5
43	06-82-7252	#8-32 x 3/8" PH T-20	22-26	25-30
55	06-82-5320	#8-32 x 5/8" PH T-20	26-31	30-36
73	06-82-7261	#6-19 x 11/16" PH T-15	16-21	19-24
74	06-82-7270	#8-16 x 5/8" PH T-20	16-21	19-24
79	06-82-5294	1/4"-20 UNC-2A PH T-30	65-74	75-85
81	06-82-7251	#8-16 x 3/8" PH T-20	10-14	12-16
87	06-82-0045	3/8"-16 UNC-3A T-20	87-104	100-120
89	06-82-5316	#8-32 x 1/2" PH T-20	16-21	19-24

Dimension between inside edges of blade tensioning bars: 35.8 ±0.2mm (1-13/32")
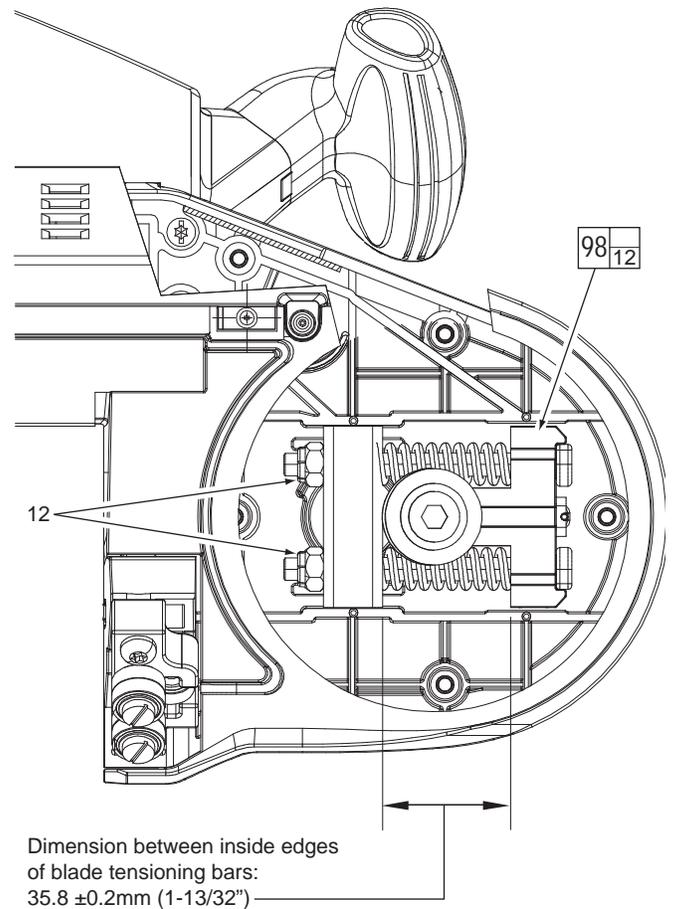
WIRING INSTRUCTIONS-
From Terminal Block Assembly
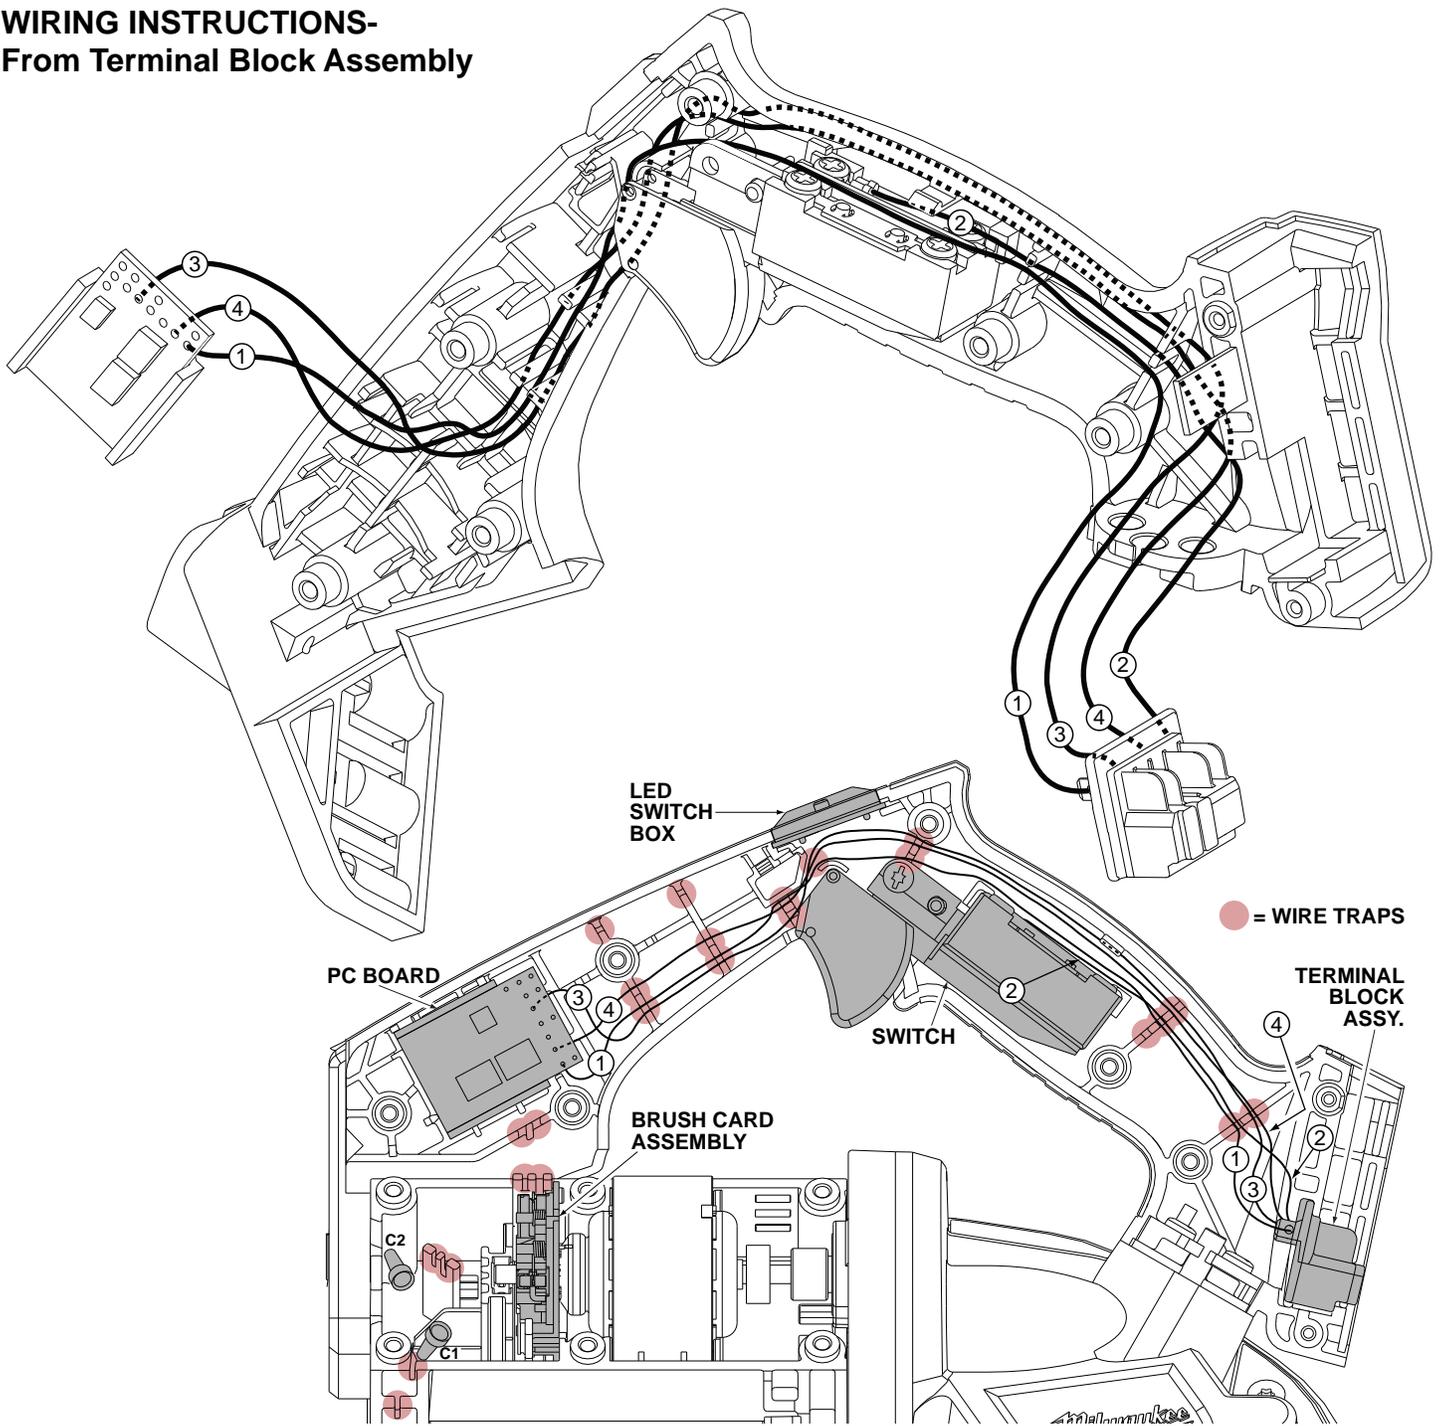
③

④

①

②

②

①

③

④

LED SWITCH BOX

● = WIRE TRAPS

PC BOARD

③

④

②

SWITCH

TERMINAL BLOCK ASSY.

④

①

②

①

③

**BRUSH CARD ASSEMBLY**

C2

C1

Milwaukee

AS AN AID TO REASSEMBLY, TAKE NOTICE OF WIRE ROUTING AND POSITION IN WIRE GUIDES AND TRAPS WHILE DISMANTLING TOOL.

BE CAREFUL AND AVOID PINCHING WIRES BETWEEN HANDLE HALVES WHEN ASSEMBLING.

WIRING SPECIFICATIONS				
Wire No.	Wire Color	Origin or Gauge	Length	Terminals, Connectors and 1 or 2 End Wire Preparation
1	Black	Electronics Kit	-----	Connects from Terminal Block Assembly to PCB.
2	Red	Electronics Kit	-----	Connects from Terminal Block Assembly to Switch.
3	Black	Electronics Kit	-----	Connects from Terminal Block Assembly to PCB.
4	Pink	Electronics Kit	-----	Connects from Terminal Block Assembly to PCB.
5	White	Electronics Kit	-----	Connects from LED Switch Box to PCB.
6	Pink	Electronics Kit	-----	Connects from LED Switch Box to LED.
7	Black	Electronics Kit	-----	Connects from LED Switch Box to PCB.
8	Pink	Electronics Kit	-----	Connects from LED Switch Box to PCB.
9	Red	Electronics Kit	-----	Connects from PCB to Wire #13 from Brush Card with C1.
10	Black	Electronics Kit	-----	Connects from PCB to Wire #12 from Brush Card with C2.
11	Black	Electronics Kit	-----	Connects from PCB to LED.
12	Black	Brush Card Assy.	-----	Connects from Brush Card to Wire #10 from PCB with C2.
13	Red	Brush Card Assy.	-----	Connects from Brush Card to Wire #9 from PCB with C1.
14	Black	Electronics Kit	-----	Connects from PCB to Switch. (See detail on page 5).
15	Black	Electronics Kit	-----	Connects from PCB to Switch. (See detail on page 5).
16	Pink	Electronics Kit	-----	Connects from PCB to Switch. (See detail on page 5).

WIRING INSTRUCTIONS-
To Switch

Wire #2 is a component of the Terminal Block Assembly. See page 4 for wire routing and trapping.

⑯ ⑭ ⑮ ② ⑯ ⑮ ⑭ ②

LED
SWITCH
BOX

⬤ = WIRE TRAPS

PC BOARD

⑯ ⑭ ⑮

TERMINAL
BLOCK
ASSY.

SWITCH

⑭ ⑯ ⑮ ②

BRUSH CARD
ASSEMBLY

C2

C1

**AS AN AID TO REASSEMBLY,
TAKE NOTICE OF WIRE ROUTING AND
POSITION IN WIRE GUIDES AND TRAPS
WHILE DISMANTLING TOOL.**

**BE CAREFUL AND AVOID PINCHING
WIRES BETWEEN HANDLE HALVES
WHEN ASSEMBLING.**

\multicolumn{5}{c}{**WIRING SPECIFICATIONS**}				
Wire No.	Wire Color	Origin or Gauge	Length	Terminals, Connectors and 1 or 2 End Wire Preparation
1	Black	Electronics Kit	-----	Connects from Terminal Block Assembly to PCB.
2	Red	Electronics Kit	-----	Connects from Terminal Block Assembly to Switch.
3	Black	Electronics Kit	-----	Connects from Terminal Block Assembly to PCB.
4	Pink	Electronics Kit	-----	Connects from Terminal Block Assembly to PCB.
5	White	Electronics Kit	-----	Connects from LED Switch Box to PCB.
6	Pink	Electronics Kit	-----	Connects from LED Switch Box to LED.
7	Black	Electronics Kit	-----	Connects from LED Switch Box to PCB.
8	Pink	Electronics Kit	-----	Connects from LED Switch Box to PCB.
9	Red	Electronics Kit	-----	Connects from PCB to Wire #13 from Brush Card with C1.
10	Black	Electronics Kit	-----	Connects from PCB to Wire #12 from Brush Card with C2.
11	Black	Electronics Kit	-----	Connects from PCB to LED.
12	Black	Brush Card Assy.	-----	Connects from Brush Card to Wire #10 from PCB with C2.
13	Red	Brush Card Assy.	-----	Connects from Brush Card to Wire #9 from PCB with C1.
14	Black	Electronics Kit	-----	Connects from PCB to Switch. (See detail on page 5).
15	Black	Electronics Kit	-----	Connects from PCB to Switch. (See detail on page 5).
16	Pink	Electronics Kit	-----	Connects from PCB to Switch. (See detail on page 5).

WIRING INSTRUCTIONS-
From PC Board and
Brush Card Assembly

AS AN AID TO REASSEMBLY, TAKE NOTICE OF WIRE ROUTING AND POSITION IN WIRE GUIDES AND TRAPS WHILE DISMANTLING TOOL.

BE CAREFUL AND AVOID PINCHING WIRES BETWEEN HANDLE HALVES WHEN ASSEMBLING.

22-56-0150
Wire Nut
(C1 & C2)

Brush Card Assy.

Brush Shunt (4 places)

Right Brush Spring (2x)

Carbon Brush (4x)

Left Brush Spring (2x)

● = WIRE TRAPS

LED
SWITCH
BOX

PC BOARD

SWITCH

• Be sure carbon brush is in brush tube with brush shunt moving freely in side groove of tube.
• Place brush spring over post with short leg positioned downward as shown. Be sure spring is completely down with short leg trapped against 'Y' shaped wall on brush card.
  • While holding spring in place, bring the long leg of spring over the brush tube and through rear opening of tube. Position rounded hook of spring in groove on the back of carbon brush. Be sure to check for free movement between the carbon brush, brush shunt and brush spring.

BRUSH CARD
ASSEMBLY

LED

WIRING SPECIFICATIONS

Wire No.	Wire Color	Origin or Gauge	Length	Terminals, Connectors and 1 or 2 End Wire Preparation
1	Black	Electronics Kit	-----	Connects from Terminal Block Assembly to PCB.
2	Red	Electronics Kit	-----	Connects from Terminal Block Assembly to Switch.
3	Black	Electronics Kit	-----	Connects from Terminal Block Assembly to PCB.
4	Pink	Electronics Kit	-----	Connects from Terminal Block Assembly to PCB.
5	White	Electronics Kit	-----	Connects from LED Switch Box to PCB.
6	Pink	Electronics Kit	-----	Connects from LED Switch Box to LED.
7	Black	Electronics Kit	-----	Connects from LED Switch Box to PCB.
8	Pink	Electronics Kit	-----	Connects from LED Switch Box to PCB.
9	Red	Electronics Kit	-----	Connects from PCB to Wire #13 from Brush Card with C1.
10	Black	Electronics Kit	-----	Connects from PCB to Wire #12 from Brush Card with C2.
11	Black	Electronics Kit	-----	Connects from PCB to LED.
12	Black	Brush Card Assy.	-----	Connects from Brush Card to Wire #10 from PCB with C2.
13	Red	Brush Card Assy.	-----	Connects from Brush Card to Wire #9 from PCB with C1.
14	Black	Electronics Kit	-----	Connects from PCB to Switch. (See detail on page 5).
15	Black	Electronics Kit	-----	Connects from PCB to Switch. (See detail on page 5).
16	Pink	Electronics Kit	-----	Connects from PCB to Switch. (See detail on page 5).

WIRING INSTRUCTIONS-
All wire routings and trapping

AS AN AID TO REASSEMBLY, TAKE NOTICE OF WIRE ROUTING AND POSITION IN WIRE GUIDES AND TRAPS WHILE DISMANTLING TOOL.

BE CAREFUL AND AVOID PINCHING WIRES BETWEEN HANDLE HALVES WHEN ASSEMBLING.

PC BOARD- BACK SIDE

PC BOARD

LED SWITCH BOX

● = WIRE TRAPS

TERMINAL BLOCK ASSEMBLY

SWITCH

BRUSH CARD ASSEMBLY

C2

C1

LED

WIRING SPECIFICATIONS				
Wire No.	Wire Color	Origin or Gauge	Length	Terminals, Connectors and 1 or 2 End Wire Preparation
1	Black	Electronics Kit	-----	Connects from Terminal Block Assembly to PCB.
2	Red	Electronics Kit	-----	Connects from Terminal Block Assembly to Switch.
3	Black	Electronics Kit	-----	Connects from Terminal Block Assembly to PCB.
4	Pink	Electronics Kit	-----	Connects from Terminal Block Assembly to PCB.
5	White	Electronics Kit	-----	Connects from LED Switch Box to PCB.
6	Pink	Electronics Kit	-----	Connects from LED Switch Box to LED.
7	Black	Electronics Kit	-----	Connects from LED Switch Box to PCB.
8	Pink	Electronics Kit	-----	Connects from LED Switch Box to PCB.
9	Red	Electronics Kit	-----	Connects from PCB to Wire #13 from Brush Card with C1.
10	Black	Electronics Kit	-----	Connects from PCB to Wire #12 from Brush Card with C2.
11	Black	Electronics Kit	-----	Connects from PCB to LED.
12	Black	Brush Card Assy.	-----	Connects from Brush Card to Wire #10 from PCB with C2.
13	Red	Brush Card Assy.	-----	Connects from Brush Card to Wire #9 from PCB with C1.
14	Black	Electronics Kit	-----	Connects from PCB to Switch. (See detail on page 5).
15	Black	Electronics Kit	-----	Connects from PCB to Switch. (See detail on page 5).
16	Pink	Electronics Kit	-----	Connects from PCB to Switch. (See detail on page 5).